



CATALOG

中山市祥霖照明科技有限公司

ZHONGSHAN SHINING LIGHTING TECH CO., LTD

地址：中山市横栏镇新茂工业区工业大道38号

Factory add: No.38, Gongye Ave., Xinmao Industrial District,
Henglan Town, Zhongshan City, Guangdong Province, China.
Http://www.shiningled.net Tel: +86-760-87565566



About Shining

Zhong Shan Shining Lighting Technology Co., Ltd was founded in 2008, specializing in commercial lighting research and development, production and sales. We work with process from Tools making , Die-casting , Stamping, Welding and Polishing, CNC solution, Drilling, Routing, Sawing, Shaping etc.

Our products are exported to more than 50 countries and regions worldwide with more than 200 lighting companies, supermarket, wholesalers and contractors.

Our main market are Europe,Australia and Middle East. Main products are included down light,panel light,linear light,track light and technical wall light.

Our MISSION

Our mission as a company is to
create long-term value for our customers ,
Help our employees to realize their dreams.

Our VISION

Create and sustain highest levels of
customer and employee satisfaction
in the LED industry.

Our VALUES

Solidarity Innovation Win-win
Dedication

V.2019

PANEL LIGHT



.....05-10




WIRELESS CHARGE WALL LAMP



.....62-65



LINEAR LIGHT



.....11-16



STEP LIGHT



.....66-67



DOWN LIGHT



.....17-32



MAGNETIC TRACK LIGHT



.....68-77



SPOT LIGHT



.....33-59



TRACK LIGHT



.....78-91



PENDANT LIGHT



.....60-61




GU10 SPOT LIGHT



.....92-99





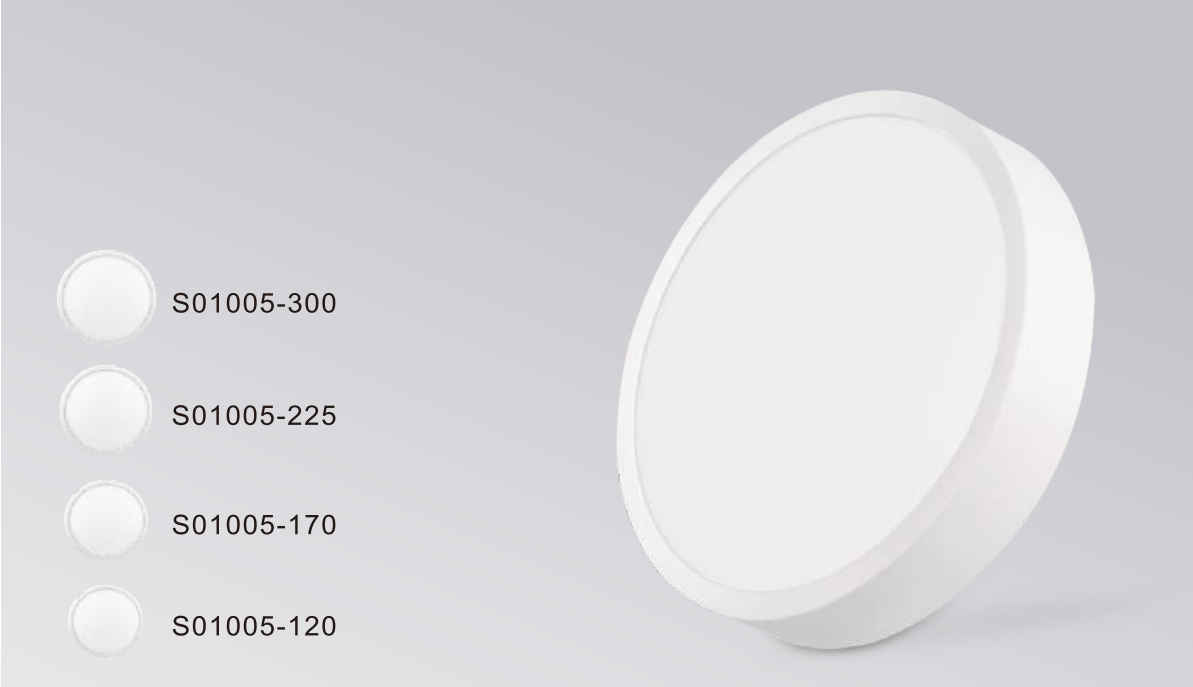

IMPERIA



Material:Aluminum die-casting



Easy installation

CRI>80



Item No.	Power/W	Lumen/LM	Size/MM	Hole cut
S01005-120	8W	680lm	120mm	surface
S01005-170	15W	1190lm	170mm	surface
S01005-225	22W	2040lm	225mm	surface
S01005-300	30W	2660lm	300mm	surface






LORIA



Material:Aluminum die-casting



Easy installation

CRI>80         

Item No.	Power/W	Lumen/LM	Size/MM	Hole cut
S01006-120	8W	680lm	120x120mm	surface
S01006-170	15W	1190lm	170x170mm	surface
S01006-225	22W	2040lm	225x225mm	surface
S01006-300	30W	2660lm	300x300mm	surface







MASS



ALESS




CRI>80




Item No.	Power/W	Lumen/LM	Size/MM	Hole cut
S01001-90	6W	420lm	φ 90mm	φ 80mm
S01001-145	12W	1020lm	φ 145mm	φ 130mm
S01001-175	18W	1480lm	φ 175mm	φ 160mm
S01001-225	24W	2040lm	φ 225mm	φ 200mm
S01002-90	6W	450lm	90*90mm	80*80mm
S01002-145	12W	960lm	145*145mm	130*130mm
S01002-175	18W	1440lm	175*175mm	160*160mm
S01002-225	24W	1920lm	225*225mm	200*200mm



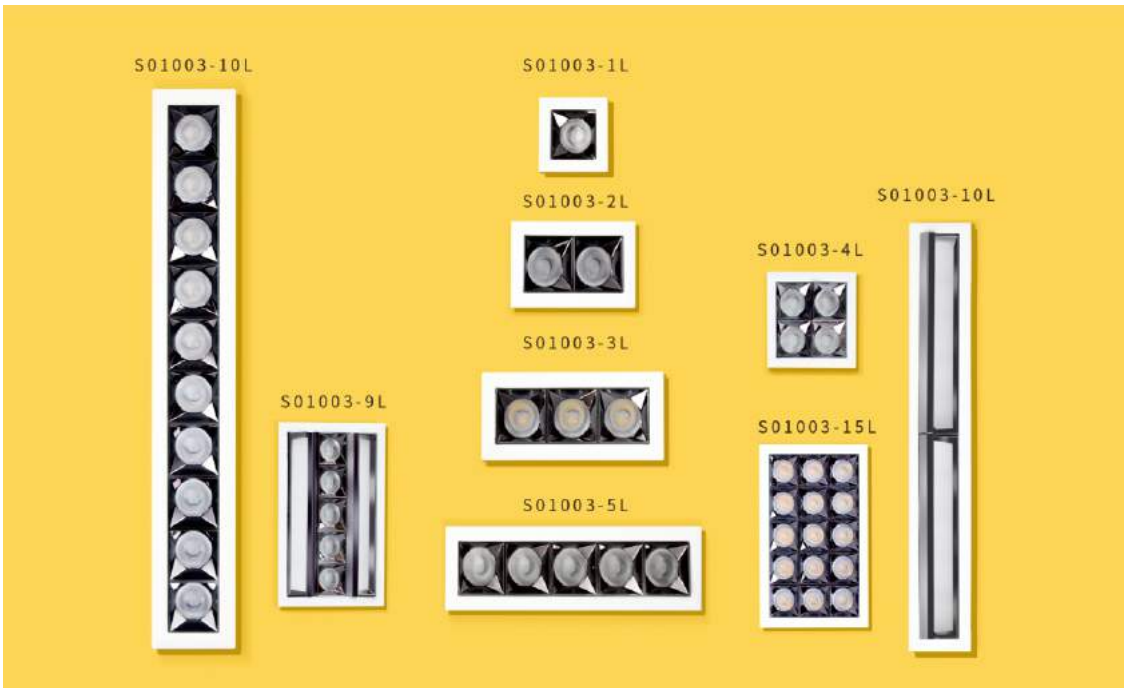

COCO

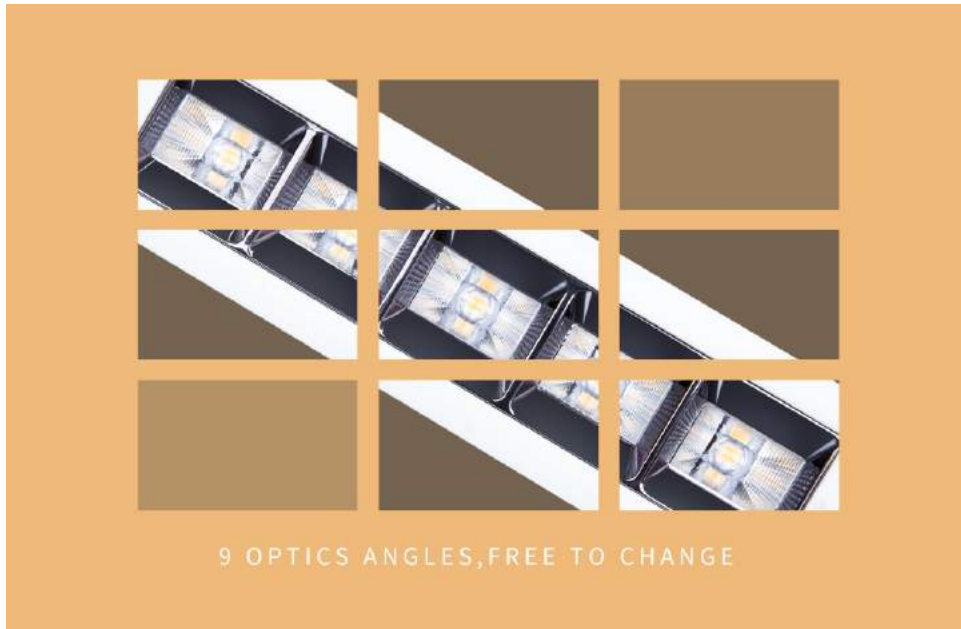

ITEM NO.	POWER	Lumen(lm)	SIZE(mm)	HOLE CUT(mm)
S01003-1L	6W	740lm	57*57*H40mm	45*45mm
S01003-2L	10W	1110lm	57*95*H40mm	45*85mm
S01003-3L	13W	1452lm	59*135*H40mm	45*135mm
S01003-4L	13W	1452lm	95*95*H40mm	85*85mm

ITEM NO.	POWER	Lumen(lm)	SIZE(mm)	HOLE CUT(mm)
S01003-5L	20W	2265lm	59*211*H60mm	45*195mm
S01003-9L	26W	3220lm	135*135*H64mm	125*125mm
S01003-10L	30W	3528lm	61*403*H64mm	45*390mm
S01003-15L	34W	4080lm	137*214*H64mm	125*200mm



CRI>80 IP20

○ Round



15°



24°



38°



50°

□ Square



50°X50°



75°X75°

○ Oval



70°

□ Rectangle



35°X75°

△ Wall washer



Wall washer

(Optics optional)

Superior linear light luminaire made of aluminum die-casting
Frameless beautiful looking & fasten clips installation, screwless.



GODIVAL


ITEM NO.	POWER	Lumen(lm)	SIZE(mm)
S01004-4L	13W	1452lm	82*82*H70mm
S01004-5L	20W	2265lm	196*44*H70mm
S01004-9L	26W	3220lm	120*120*H70mm
S01004-10L	30W	3528lm	387*45*H70mm
S01004-15L	34W	4080lm	196*120*H70mm




CRI>80 IP20



9 OPTICS ANGLES, FREE TO CHANGE

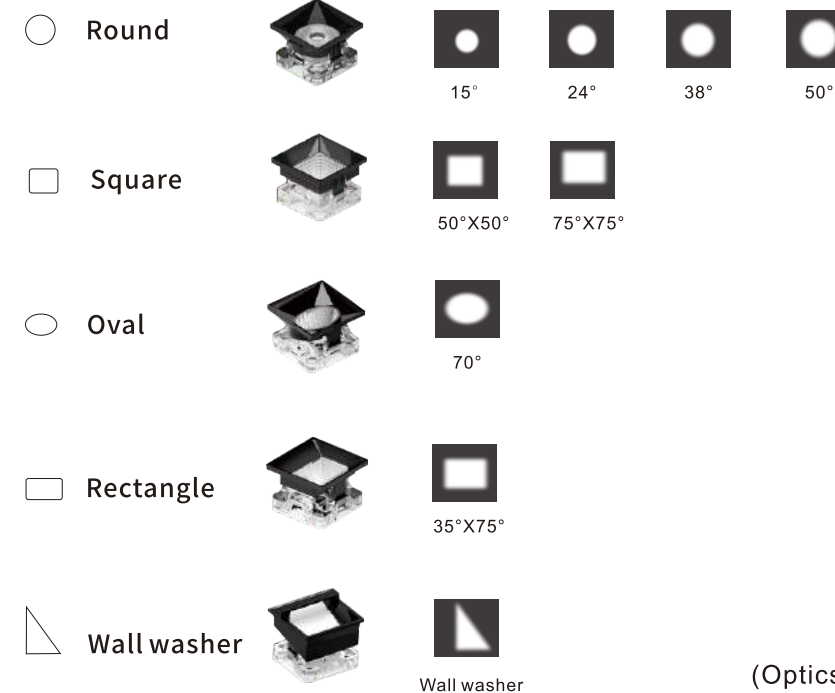

(Optics optional)

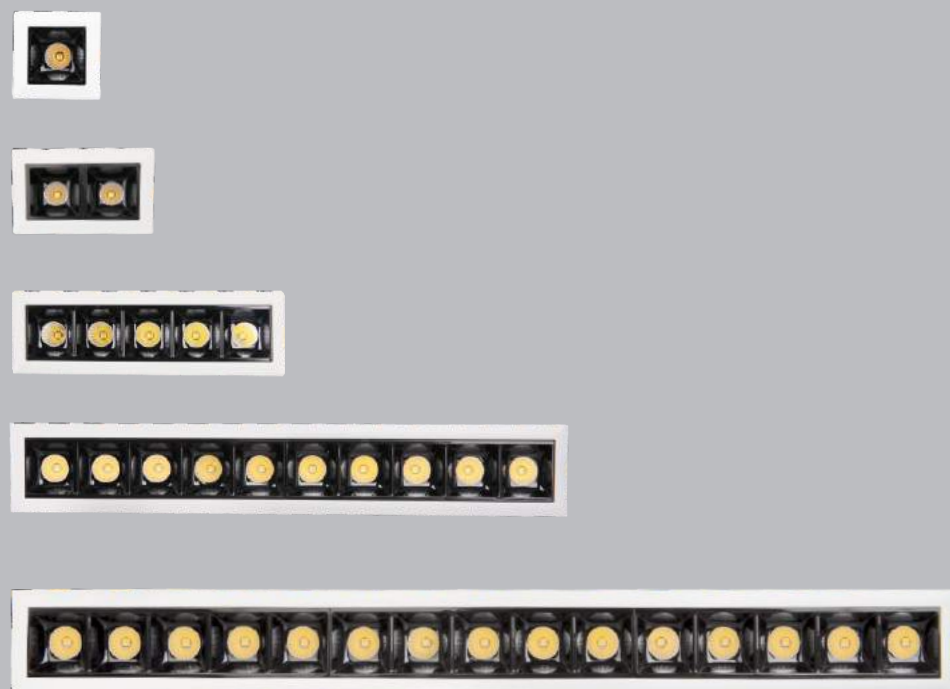


Linear light
ISNELLO




S01013-1L

Size:45*45*47mm
Power:3W
Lumen:225lm
Hole cut:37*37mm




S01013-2L

Size:75*45*47mm
Power:6W
Lumen:450lm
Hole cut:67*37mm




S01013-5L

Size:147*45*47mm
Power:10W
Lumen:900lm
Hole cut:140*37mm




S01013-10L

Size:279*45*47mm
Power:20W
Lumen:1900lm
Hole cut:276*37mm




S01013-15L

Size:412*45*47mm
Power:30W
Lumen:2850lm
Hole cut:403*37mm



Optics optional:15°/30°/45°

CRI>80 CREE

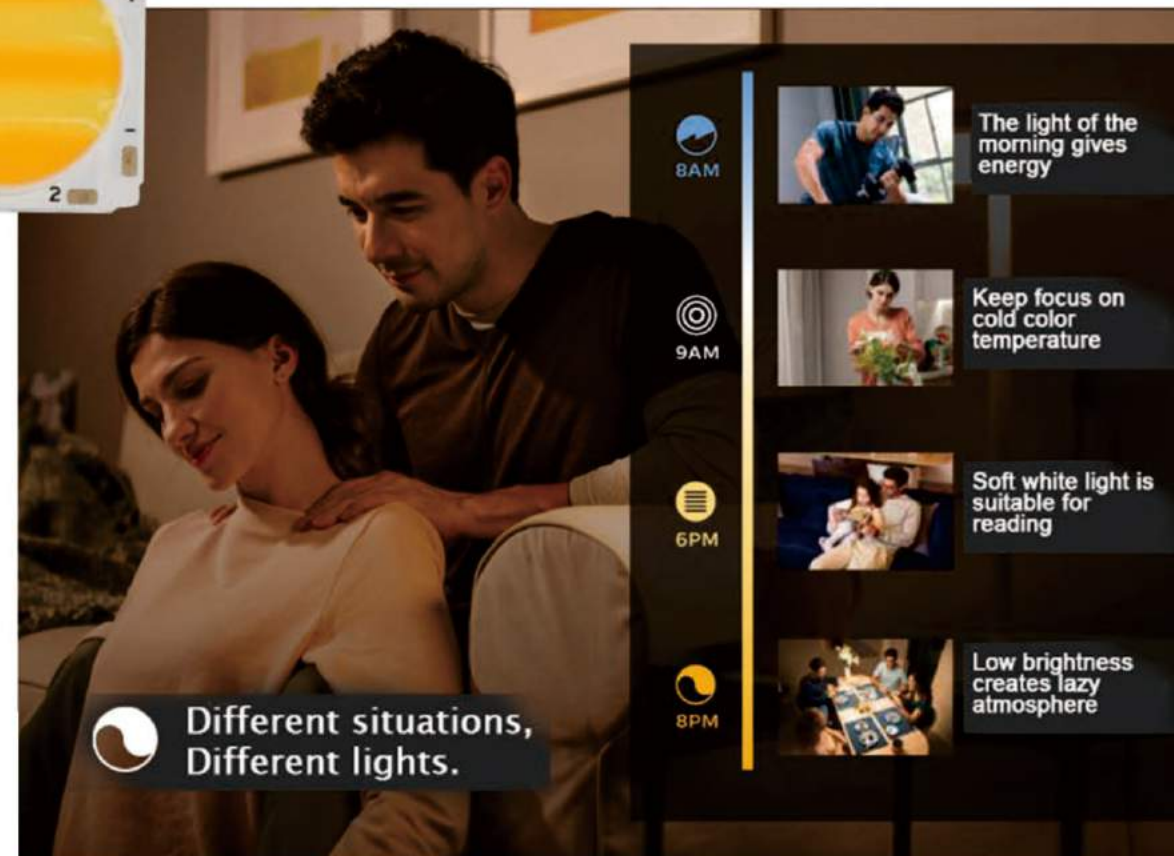

Support:





TURN

Popular LED down light series

Color changeable 3000K / 4000K / 6000K




S01007 (Single color)




(with switch)

S01007B (CCT change)



Luminous Intensity Distribution Curve



CRI>80 LiFUD

Item No.	Power/W	Lumen/LM	Size/MM	Hole cut
S01007. 1	7W	525lm	90x34mm	φ 80mm
S01007. 2	12W	865lm	115x34mm	φ 90mm
S01007. 3	15W	1200lm	144x40mm	φ 120mm
S01007. 4	20W	1950lm	180x40mm	φ 150mm
S01007. 5	30W	2915lm	225x45mm	φ 200mm

FLAT





CRI>80 bridgeLux LiFud®

Item No.	Power/W	Lumen/LM	Size/MM	Hole cut
C01005-90	7W	558lm	φ 90x46mm	φ 70mm
C01005-120	10W	900lm	φ 120x48.5mm	φ 90mm
C01005-170	15W	1475lm	φ 170x57.5mm	φ 145mm
C01005-225	30W	2780lm	φ 225x59.5mm	φ 200mm



STAIR

D O W N L I G H T



CRI>80

bridgeLux LiFud

Item No.	Power/W	Lumen/LM	Size/MM	Hole cut
C01098-90	7W	540lm	φ 90x52.5mm	φ 70mm
C01098-120	10W	900lm	φ 120x49mm	φ 95mm
C01098-170	15W	1470lm	φ 170x49mm	φ 150mm
C01098-225	30W	2850lm	φ 225x57.5mm	φ 200mm




MARS

Aluminum recessed downlight unique and elegant design
Smart heat dissipation SMD indirect reflected light no glare & no shadows




front



SMD indirect reflected light
No glare and no shadows



back



130°



CRI>80 **LiFuD**

Item No.	Power/W	Lumen/LM	Size/MM	Hole cut
S01085. 1	8W	330lm	105x35mm	95mm
S01085. 2	12W	660lm	150x50mm	135mm
S01085. 3	18W	1080lm	173x55mm	160mm
S01085. 4	24W	1440lm	230x75mm	205mm

RATE



- Matt white
- Satin nickle



CRI>80






Item No.	Power/W	Lumen/LM	Size/MM	Hole cut
S01021.1	7W	560lm	φ 105	φ 90
S01021.2	12W	960lm	φ 175	φ 145
S01021.3	20W	1600lm	φ 225	φ 190





SPACE

Aluminum recessed downlight unique and elegant design
Smart heat dissipation SMD indirect reflected light no glare & no shadows





CRI>80 **LiFud**

Item No.	Power/W	Lumen/LM	Size/MM	Hole cut
S01086. 1	6W	330lm	105x65mm	Surface
S01086. 2	12W	660lm	150x75mm	Surface
S01006. 3	18W	1080lm	173x80mm	Surface
S01006. 4	24W	1440lm	230x90mm	Surface



CORTO






CRI>80

Item No.	Power/W	Lumen/LM	Size/MM	Hole cut
S01047A. 1	7W	490lm	90x57mm	Surface
S01047A. 2	12W	960lm	120x58mm	Surface
S01047A. 3	18W	1620lm	140x58mm	Surface

P R E T T Y

Lastest elegant dimmable spot light.
Optimized light distribution design solution to make
the optical property much more excellent, UGR<16.
Internal dimmable driver PF0.9 flicker free
optics angle:40°




CRI>80



Item No.	Power/W	Lumen/LM	Size/MM	Hole cut
C01009	8W	870lm	φ 84x90.9mm	φ 72mm


MINI MONO



CRI>80 **CREE** **Galoppato®**





Item No.	Power/W	Lumen/LM	Size/MM	Hole cut
S01013-1R	3.3W	200lm	Φ 35mm	Φ 29mm

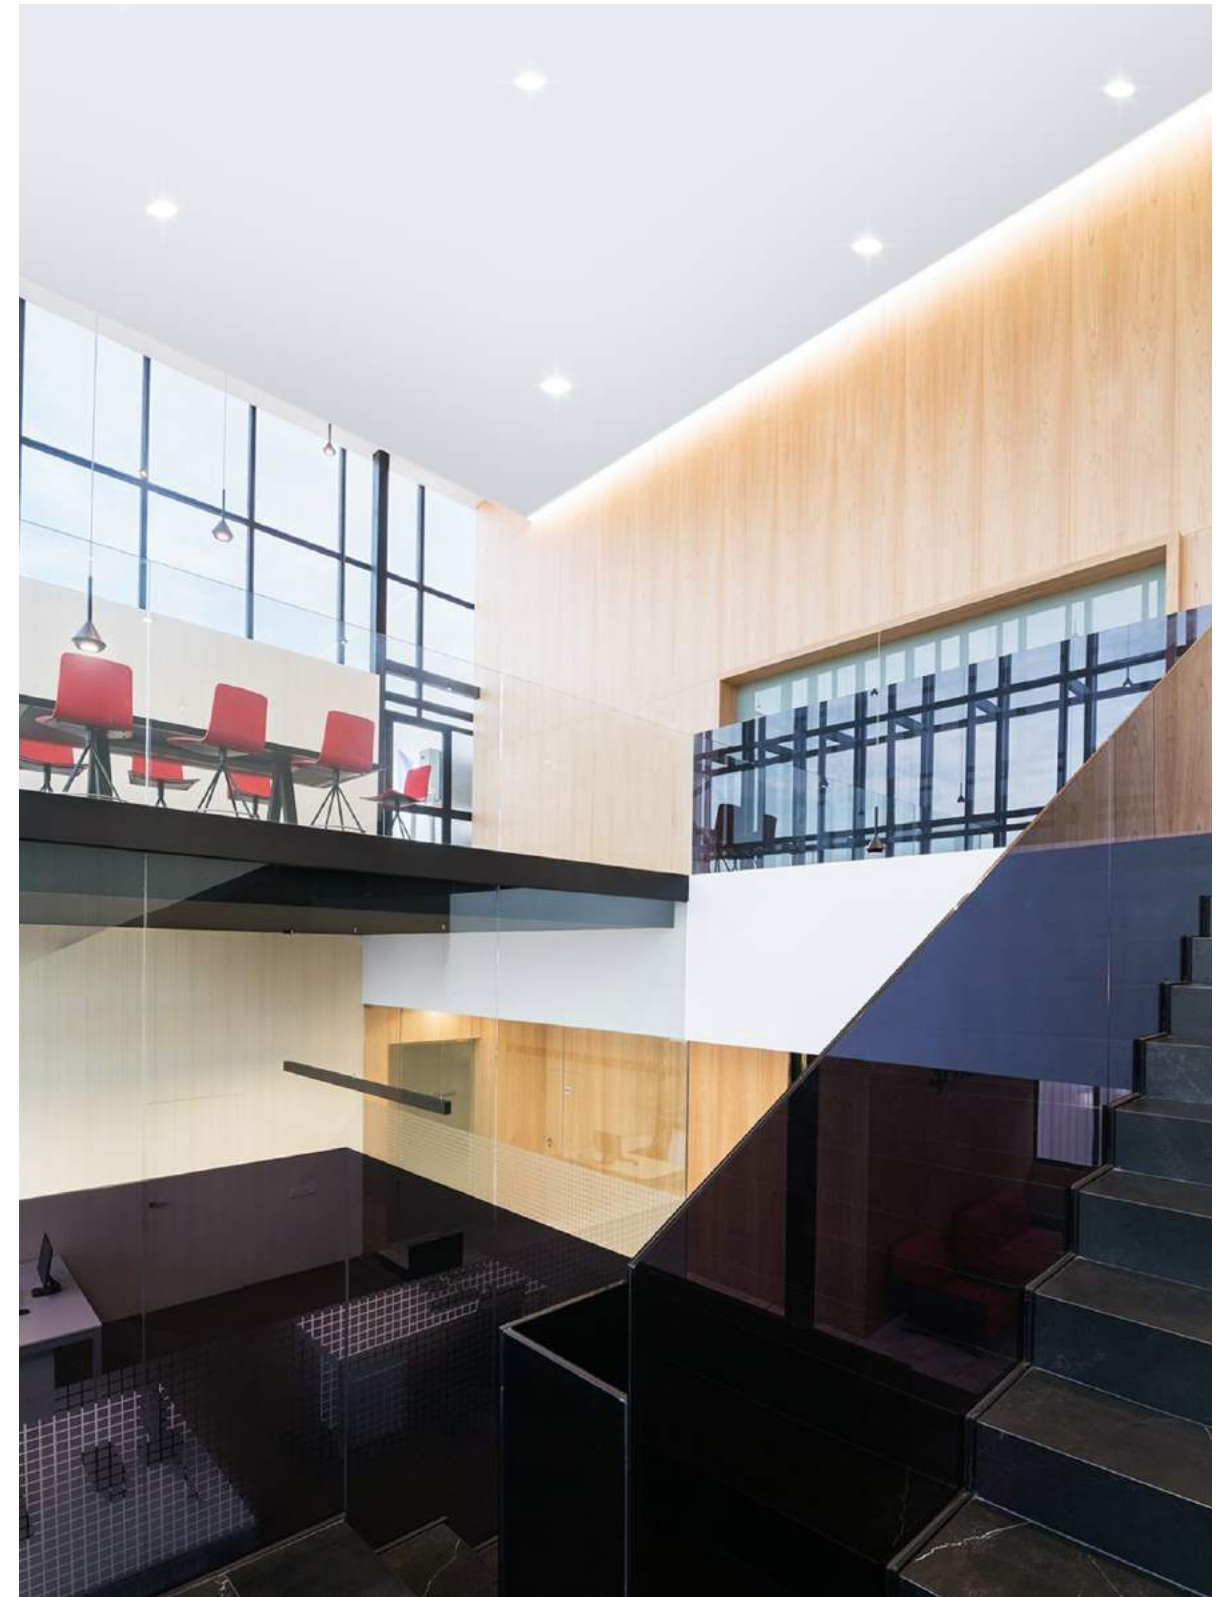



CONE



CRI>80





Item No.	Power/W	Lumen/LM	Size/MM	Hole cut	optics optional
C01048. 1	10W	960lm	φ 83*H75mm	75mm	15° 24° 38° 60°
C01048. 2	15W	1400lm	φ 105*H81mm	95mm	20° 30° 38° 60°
C01048. 3	25W	2000lm	φ 130*H88mm	120mm	15° 24° 38° 60°
C01048. 4	35W	3500lm	φ 160*H118mm	145mm	15° 24° 38° 60°
C01048. 5	40W	4200lm	φ 225*H145mm	200mm	24° 38° 60°



PYRA




with optics 15° / 20° / 24° UGR<19



CRI>80  

Item No.	Power/W	Lumen/LM	Size/MM	Hole cut	optics optional
C01049. 1	10W	960lm	83*83*H75mm	75mm	15° 24° 38° 60°
C01049. 2	15W	1400lm	105*105*H81mm	95mm	20° 30° 38° 60°
C01049. 3	25W	2000lm	130*130*H88mm	120mm	15° 24° 38° 60°
C01049. 4	35W	3500lm	160*160*H118mm	145mm	15° 24° 38° 60°
C01049. 5	40W	4200lm	225*145*H145mm	200mm	24° 38° 60°

NORA



LIFUD®  optics optional : 40°/15°/24°



Item No.	Power/W	Lumen/LM	Size/MM	CRI
C01015	30W	3550lm	φ 97mm*204.9mm	>80





SUM





TIK



Material: Aluminum die-casting
optics :40°
Rotating 330°,tilting 90°



C01061



C01065



CRI>80



DISON

Galoppato®



Item No.	Power/W	Lumen/LM	Size/MM	RA
C01061	15W	1650lm	100*105mm	>80
C01065	15W	1650lm	100*105mm	>80



C01102



C01103



CRI>80 **DISON** Galoppato®

Item No.	Power/W	Lumen/LM	Size/MM	RA
C01102	8W	760lm	75*83mm	>80
C01103	8W	760lm	75*83mm	>80



FLEX


Materials: Aluminum die-casting

optics :15°/38°/60°


Finishing available: sand white, sand black.



Luminous Intensity Distribution Curve(cd/klm)

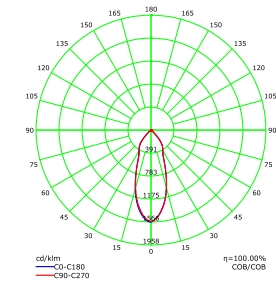

Luminous Intensity Distribution Curve(cd/klm)



C01011-1T4

ITEM NO.: C01011-1T4

POWER: 8W

LUMEN: 880lm


CCT: 4000K

SIZE: 60*190*98mm

CRI: >80

Track system

With POWERGEAR adapter 4 wires.



C01011

ITEM NO.: C01011

POWER: 8W


LUMEN: 880lm


CCT: 4000K

SIZE: 60*136.5mm

CRI: >80


surface system



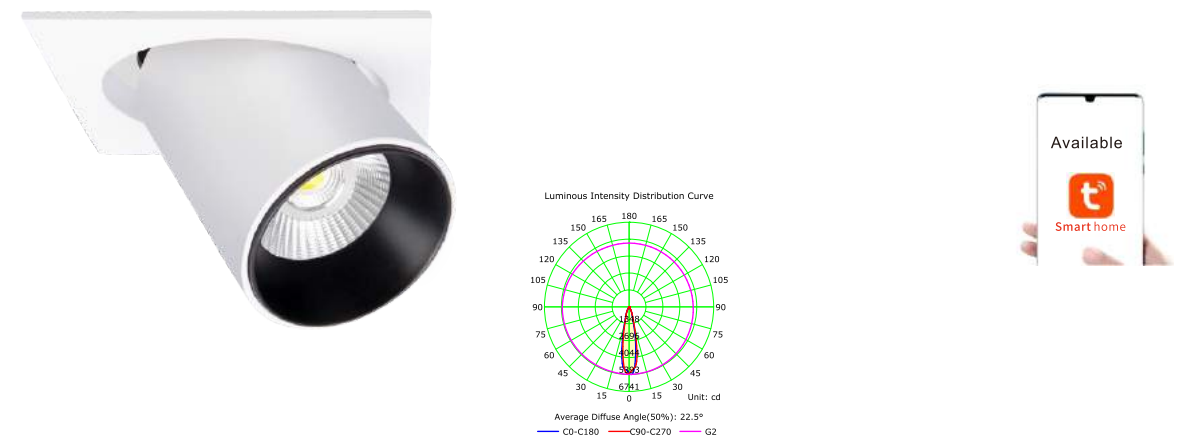



Material: Aluminum
CRI>80 **EDISON** **LiFud**

Item No.	Power/W	Lumen/LM	Size/MM	Hole cut	UGR
C01017	12W	1320lm	109*109*118	φ 90mm	<19

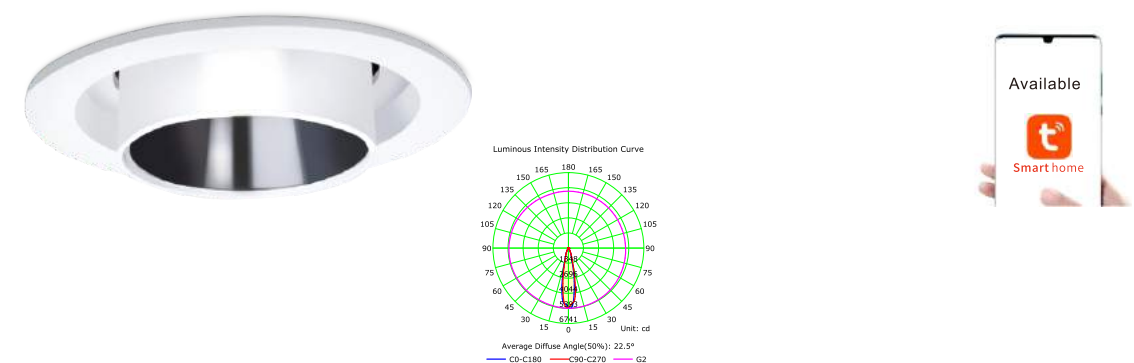

Material: Aluminum
CRI>80 **DISON** **LiFud**

Item No.	Power/W	Lumen/LM	Size/MM	Hole cut	UGR
C01018	12W	1320lm	109*109*118	φ 90mm	<19

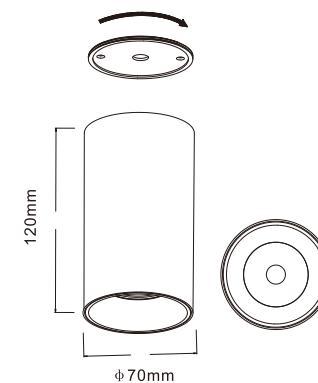

optics :40°




CRI>80


Item No.	Power/W	Lumen/LM	Size/MM	Hole cut	UGR
C01007.1	8W	840lm	70x100mm	Surface	<19
C01007.2	10W	1050lm	70x120mm	Surface	<19




silver



rose gold



gold





brown

optics optional: 15° / 30° / 45°



CRI>80 **CREE** SECCO

Item No.	Power/W	Lumen/LM	Size/MM	UGR
C01013-50	7W	490lm	φ 50*100	<19
C01013-70	12W	960lm	φ 70*100	<19
C01013-90	15W	1500lm	φ 90*115	<19
C01013-110	22W	2200lm	φ 115*130	<19

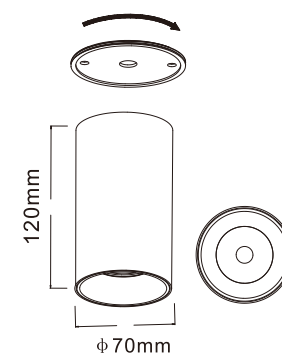

optics optional:20°/40°/60°



CRI>80  

Item No.	Power/W	Lumen/LM	Size/MM	Hole cut	UGR
C01008.1	8W	800lm	75x100mm	Surface	<19
C01008.2	10W	1000lm	75x120mm	Surface	<19




- Matt white
- Matt black




RUMIA



Rumia suspension is a pendant light available in 2 sizes
Length L250mm 7W & L450mm 10W.

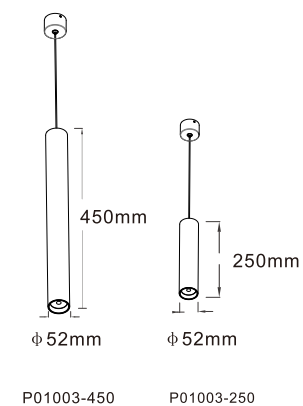

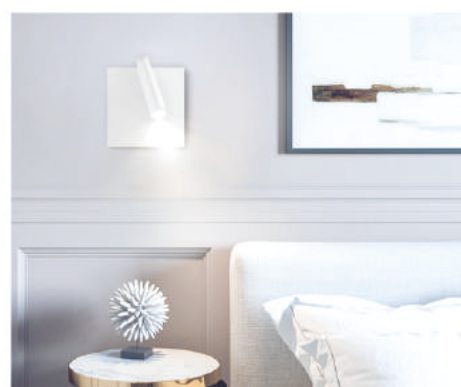

Teslo

Item No:S01018

Wattage:3W

CRI>80

Materials: Aluminum die-casting

Black

White

CREE

220-240V
50-60Hz

RoHS


Recycling


Serv. Life
30,000h

Home

IP
20

CE

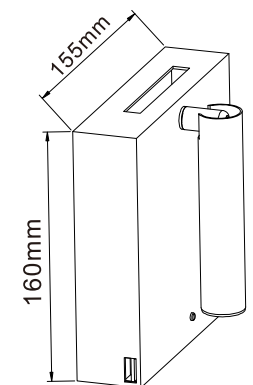

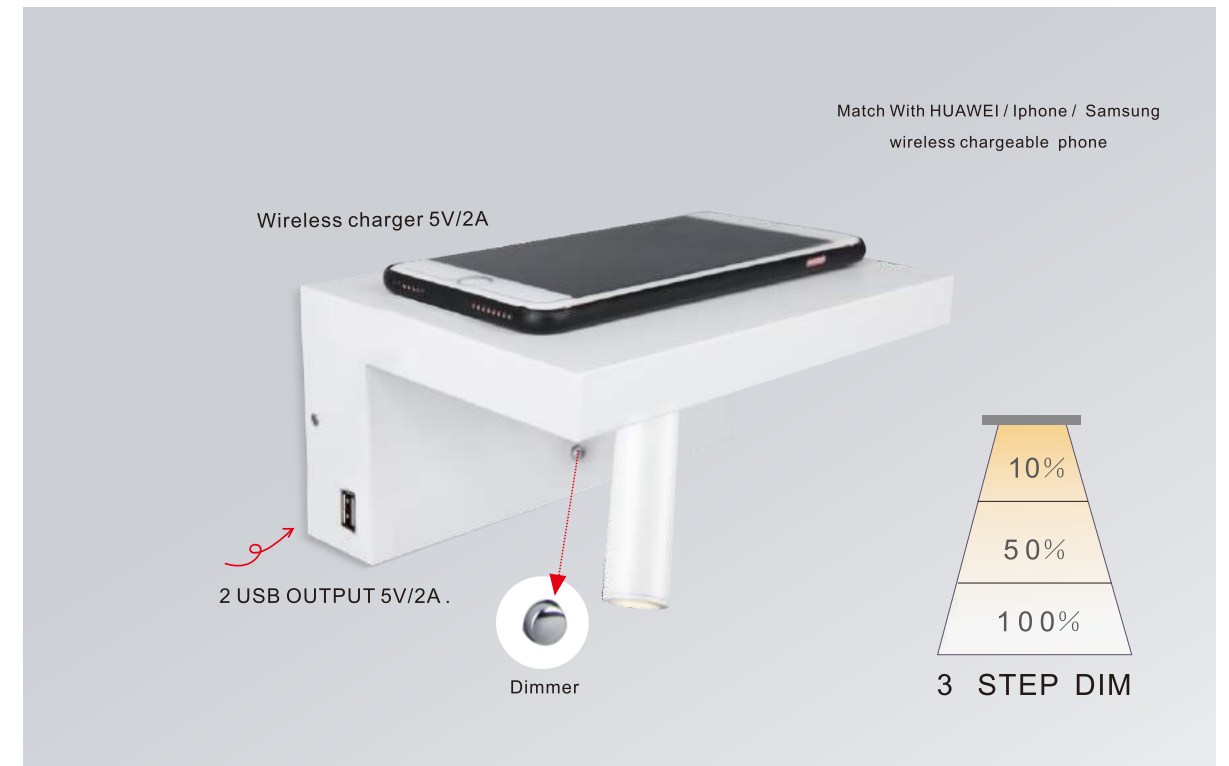

NOAH

Item No:S01038


Wattage:5W



CRI>80

Materials: Aluminum die-casting


Black

White

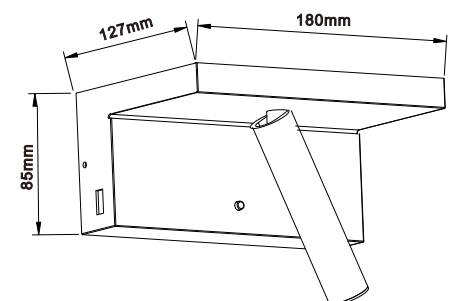


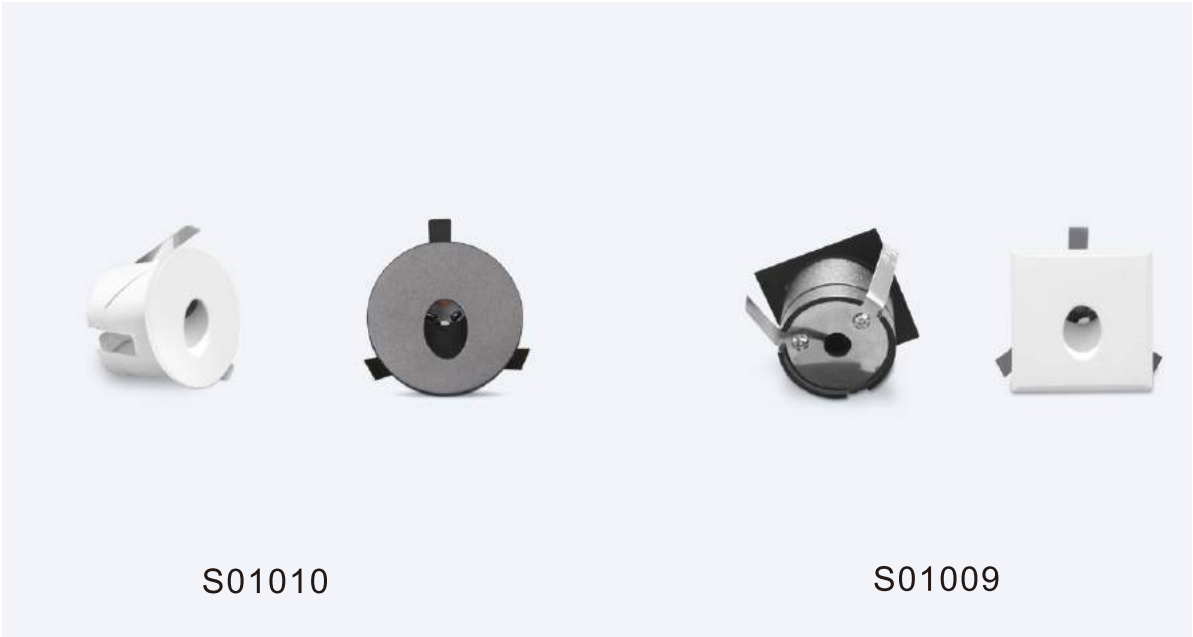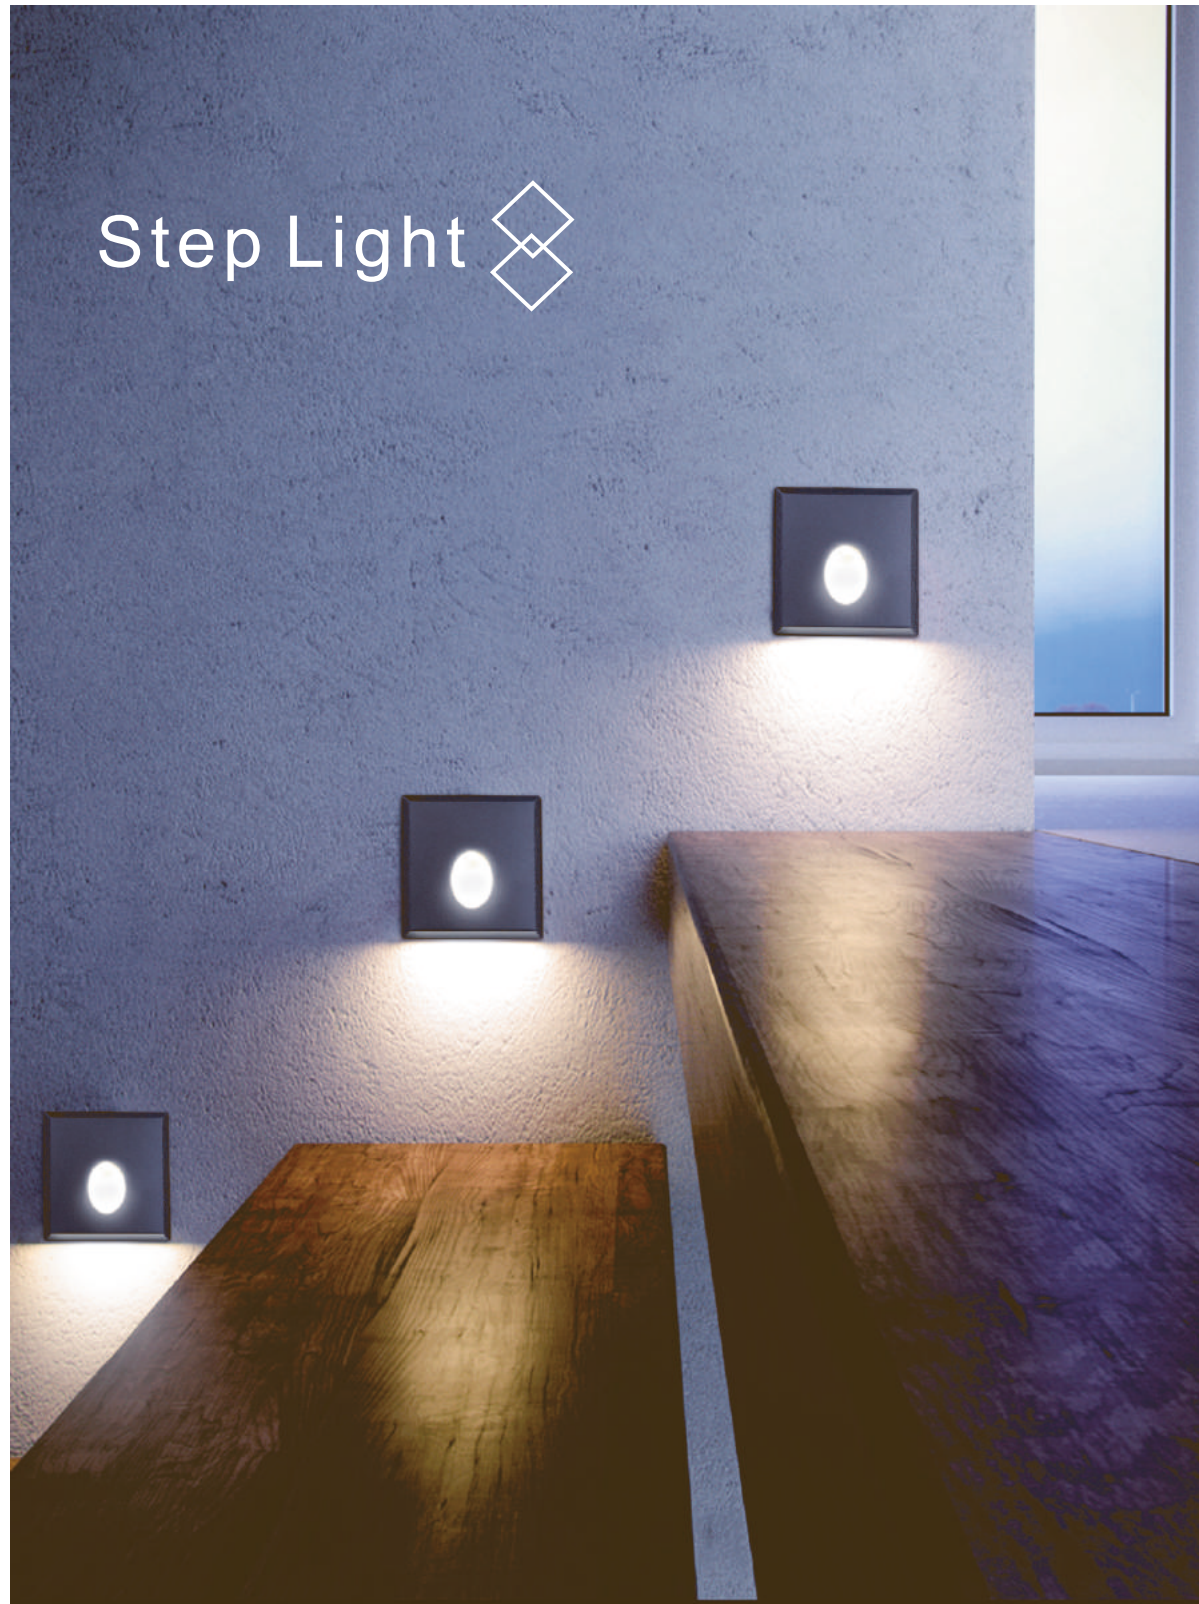

UNO

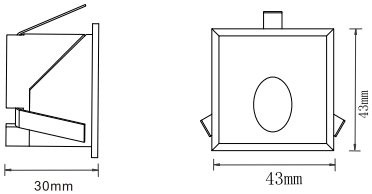

EVO

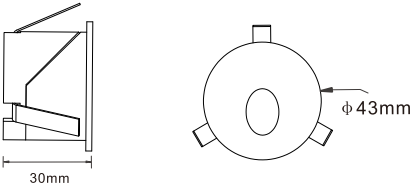

CRI>80 CREE Galoppato®

Item No.	Power/W	Size/MM	Hole cut	IP
S01009	2W	43x43mm	36 mm	54
S01010	2W	φ 43 mm	36 mm	54




After fix the light to the track
make sure the lock is on position

LOCK

MAGNETIC SYSTEM TRACK LIGHT


Dimmable & color changeable Smart control by APP

Capu

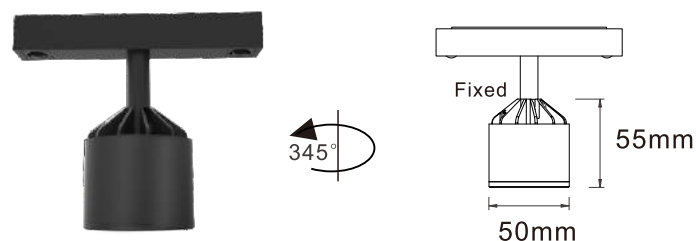

Item No:TS01010.1
Power:5W
CRI:90
Size:50*55mm
Rotating:345°
Tilt:fixed
Lumen:90-100lm/w

Telescope

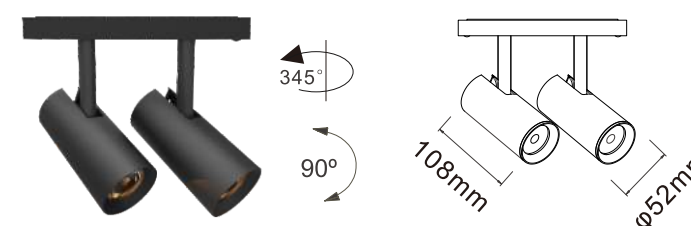


Item No:TS01008.2MT
Power:2x7W
CRI:90
Size:φ52*108mm
Rotating:345°
Tilt:90°
Lumen:90-100lm/w

Capu




Item No:TS01010.2
Power:2x5W
CRI:90
Size:50*55mm
Rotating:345°
Tilt:fixed
Lumen:90-100lm/w

Telescope

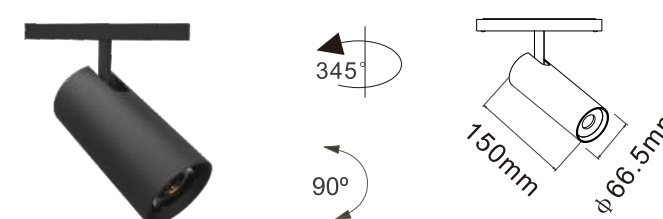


Item No:TS01008.3MT
Power:20W
CRI:90
Size:φ66.5*150mm
Rotating:345°
Tilt:90°
Lumen:90-100lm/w

Telescope

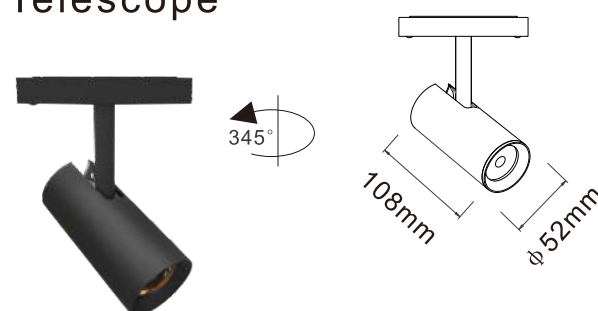

Item No:TS01008.1MT
Power:7W
CRI:90
Size:φ52*108mm
Rotating:345°
Tilt:90°
Lumen:90-100lm/w

Telescope

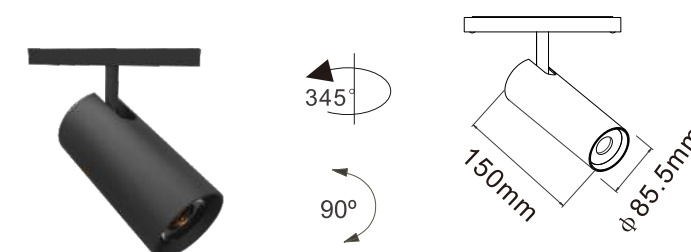


Item No:TS01008.4MT
Power:30W
CRI:90
Size:φ85.5*150mm
Rotating:345°
Tilt:90°
Lumen:90-100lm/w





LED: bridge lux

Material:Aluminum





LIGRE

Item No:TS01011.1MT
Size:60*270mm
Power:20W
CRI:80
Efficiency:90lm/W
optics optional :15° /30° /45°
Material:Aluminum

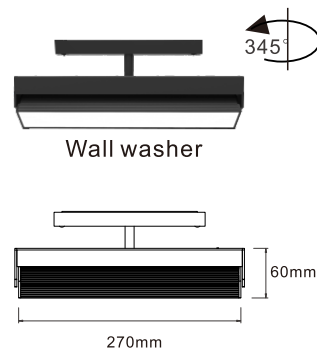

LIBRE


Item No:TS01012.1MT
Size:60*270mm
Power:20W
CRI:80
Efficiency:90lm/W
Material:Aluminum

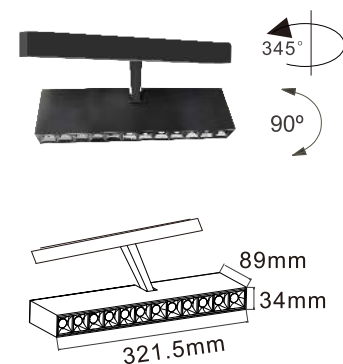


Damier

Item No:TS01001.12MT
Size:34*321.5mm
Power:30W
CRI:80
Efficiency:90lm/W
optics:45°
CREE


ONE

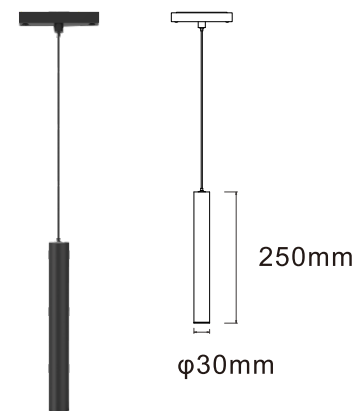

ONE

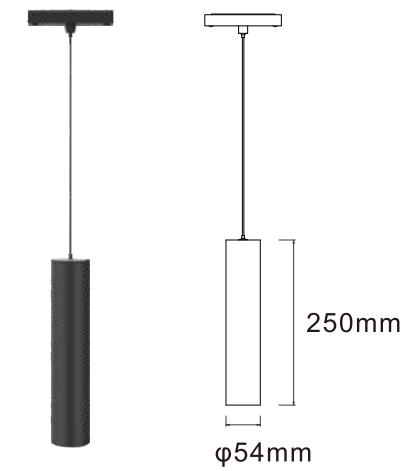

ONE

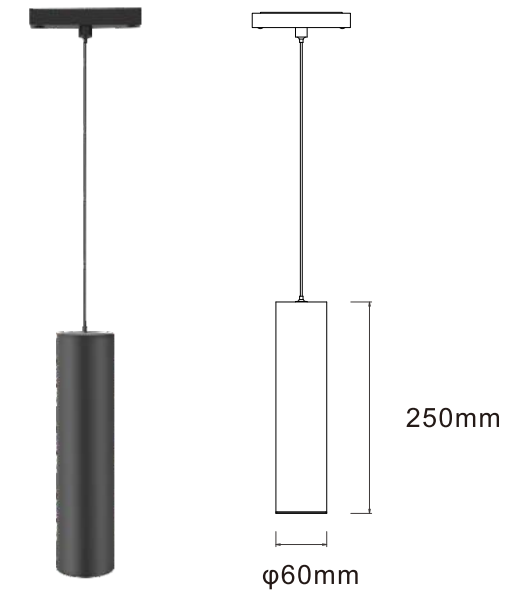

Item No:P01005-30MT
Size:φ30*250mm
Power:5W
CRI:90
Efficiency:90-100 lm/W
optics:40°



Item No:P01005-54MT
Size:φ54*250mm
Power:10W
CRI:90
Efficiency:90-100 lm/W
optics:15° /25° /38° /60°



Item No:P01005-60MT
Size:φ60*250mm
Power:15W
CRI:90
Efficiency:90-100 lm/W
optics:15° /25° /38° /60°








TK01001

Magnetic track (Surface)

COLOUR: WH BK

LENGTH:

1000mm/1500mm/2000mm/3000mm




TK01002

Magnetic track (Surface/pendant)

COLOUR: WH BK

LENGTH:

1000mm/1500mm/2000mm/3000mm





TK01003

Magnetic track (Surface/pendant)

COLOUR: WH BK

LENGTH:

1000mm/1500mm/2000mm/3000mm

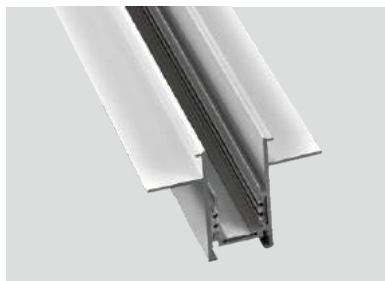


TK01004

Magnetic track (Track resessed)

COLOUR: WH BK

LENGTH:

1000mm/1500mm/2000mm/3000mm




TK01005

Magnetic track (Resessed)

COLOUR: WH BK


LENGTH:

1000mm/1500mm/2000mm/3000mm




TK01006

Power Supply




TK01007



Mini I Connector





TK01008

L Connector





Item No.	Power/W	Lumen/LM	Size/MM	CRI
TS01005.1	20W	2579lm	213*100mm	>80
TS01005.2	30W	4450lm	213*100mm	>80
TS01005.3	40W	5352lm	213*100mm	>80






Item No.	Power/W	Lumen/LM	Size/MM	CRI
TS01002-50	10W	1267lm	52*109mm	>80



CANNON

Two installation methods
One more choice One more change
optics available with 15°/ 38°/ 60°

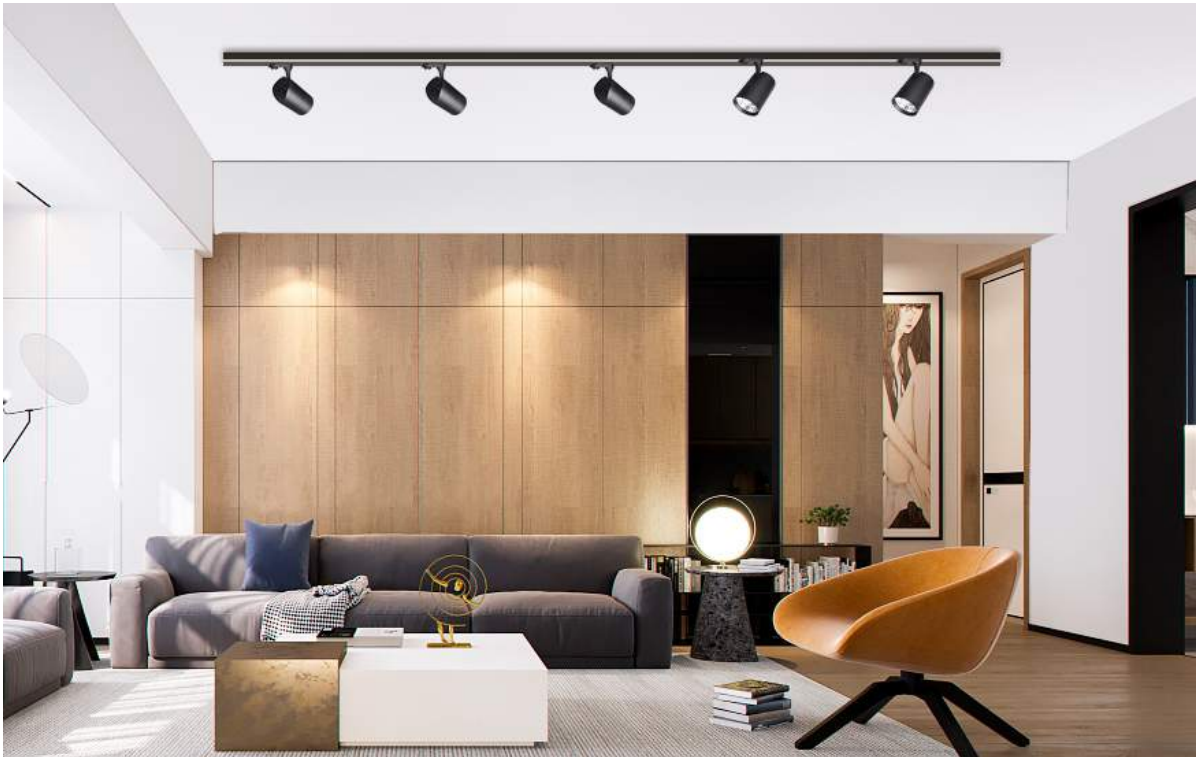

Item No.	Power/W	Lumen/LM	Size/MM	CRI
TS01002-100	20W	2655lm	150*198mm	>80
TS01002-100	30W	4095lm	150*198mm	>80





355°

90°

HIMA



355°Horizontal rotation &90°vertical to arrive to all different baam needed A real replacement of HID track light with 35W COB LED. For commercial lighting shops, showroom, museum and gallery

optics :15° / 24° / 40° / 60°



Item No.	Power/W	Lumen/LM	Size/MM	CRI
TS01009.3	25W	2399lm	96*127mm	>80
TS01009.4	35W	2450lm	109*124mm	>80


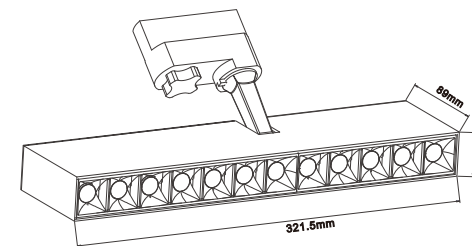


optics:45°



CREE LIFUD



Item No.	Power/W	Lumen/LM	Size/MM	CRI
TS01001-12T	35W	3356lm	H34*L321.5mm	>80

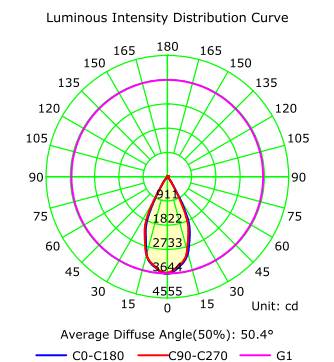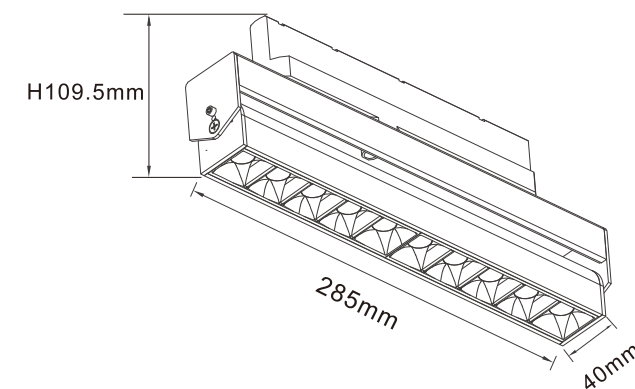

optics :15° /30° /45°



Item No.	Power/W	Lumen/LM	Size/MM	CRI
TS01006	30W	2800lm	H109.5*285mm	>80



optics :15° / 24° / 40° / 60°



Item No.	Power/W	Lumen/LM	Size/MM	CRI
TS01003.1	10W	1100lm	66*120mm	>80
TS01003.2	20W	2200lm	66*140mm	>80
TS01003.3	22W	2420lm	85*140mm	>80
TS01003.4	33W	3300lm	85*160mm	>80




MAC

MAC




C01010-1F

Material:Aluminum
Adjustable angle:Rotating:328° tilting:90°
lamp:1x GU10 , Max 50W




C01010-1R

Material:Aluminum
Adjustable angle:Rotating:328° tilting:90°
lamp:1x GU10 , Max 50W





C01010-2F

Material:Aluminum
Adjustable angle:Rotating:328° tilting:90°
lamp:2x GU10 , Max 2x50W




C01010-4F

Material:Aluminum
Adjustable angle:Rotating:328° tilting:90°
lamp:4x GU10, Max 4x50W




C01010-3F

Material:Aluminum
Adjustable angle:Rotating:328° tilting:90°
lamp:3x GU10 , Max 3x50W



C01010-3R

Material:Aluminum
Adjustable angle:Rotating:328° tilting:90°
lamp:3x GU10 , Max 3x50W





BLACK





BLACK




C01032-1F

Material:Aluminum
Adjustable angle:Rotating:328° tilting:90°
lamp:1xGU10 , Max 50W




C01032-2F

Material:Aluminum
Adjustable angle:Rotating:328° tilting:90°
lamp:2xGU10, Max 2x50W




C01032-3F

Material:Aluminum
Adjustable angle:Rotating:328° tilting:90°
lamp:3xGU10 , Max 3x50W




C01032-1R

Material:Aluminum
Adjustable angle:Rotating:328° tilting:90°
lamp:1xGU10 , Max 50W




C01032-3R

Material:Aluminum
Adjustable angle:Rotating:328° tilting:90°
lamp:3xGU10,Max 4x50W




GU10 SPOT LIGHT

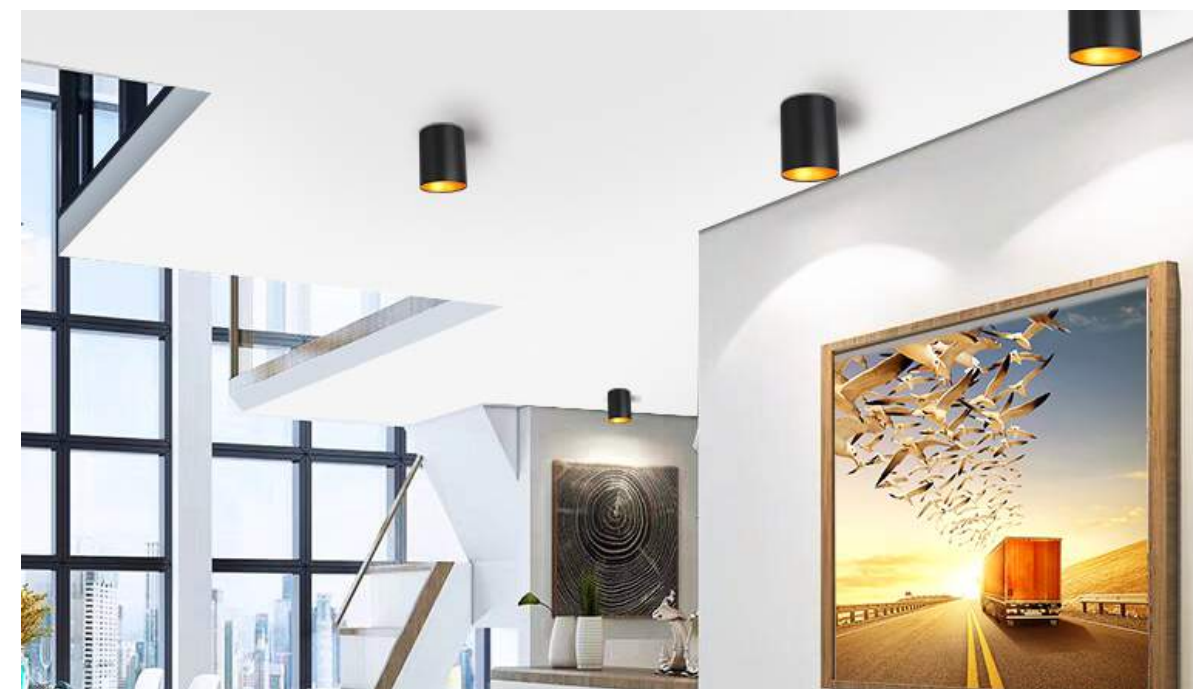

C01024





KOLO



C01025



KUBUS




C01027



VITTA




Fix






XL6304L

Size: $\phi 87 \times H22$ mm Hole cut: $\phi 75$ mm
Color: ☐ Matt white ☐ Shine white ☐ Black
 ☐ Satin nickle ☐ Anti brass
Material: Zinc Alloy

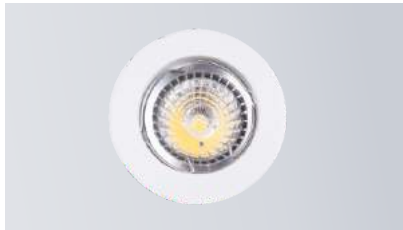

XL6208L

Size: $\phi 78 \times H24.5$ mm Hole cut: $\phi 65$ mm
Color: ☐ Matt white ☐ Shine white ☐ Black
 ☐ Satin nickle ☐ Anti brass
Material: Zinc Alloy

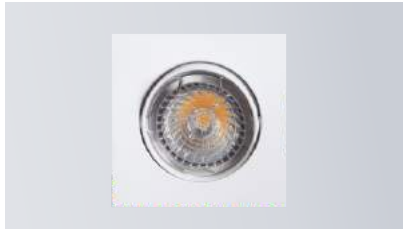


XL6106L

Size: $\phi 84 \times H20$ mm Hole cut: $\phi 75$ mm
Color: ☐ Matt white ☐ Shine white ☐ Black
 ☐ Satin nickle ☐ Anti brass
Material: Zinc Alloy



XL6810L

Size: $\phi 95 \times H20$ mm Hole cut: $\phi 85$ mm
Color: ☐ Sand white ☐ Matt white ☐ Black
 ☐ Aluminum/Shine
Material: Aluminum



XL6903L-1B

Size: $92 \times 92 \times H23$ mm Hole cut: 85 mm
Color: ☐ Sand white ☐ Matt white ☐ Black
 ☐ Aluminum/Shine
Material: Aluminum



XL6903L-2B

Size: $173 \times 92 \times H23$ mm Hole cut: 160×83 mm
Color: ☐ Sand white ☐ Matt white ☐ Black
 ☐ Aluminum/Shine
Material: Aluminum




XL6903L-3B

Size: $255 \times 92 \times H23$ mm Hole cut: 240×83 mm
Color: ☐ Sand white ☐ Matt white ☐ Black
 ☐ Aluminum/Shine
Material: Aluminum



XL6718L

Size: $\phi 84 \times H30$ mm Hole cut: $\phi 65$ mm
Color: ☐ Matt white ☐ Shine white ☐ Black
 ☐ Satin nickle ☐ Anti brass
Material: Zinc Alloy



XL6719L

Size: 82×82 mm Hole cut: 65 mm
Color: ☐ Matt white ☐ Shine white ☐ Black
 ☐ Satin nickle ☐ Anti brass
Material: Zinc Alloy

NOTES

NOTES